


Seal housing

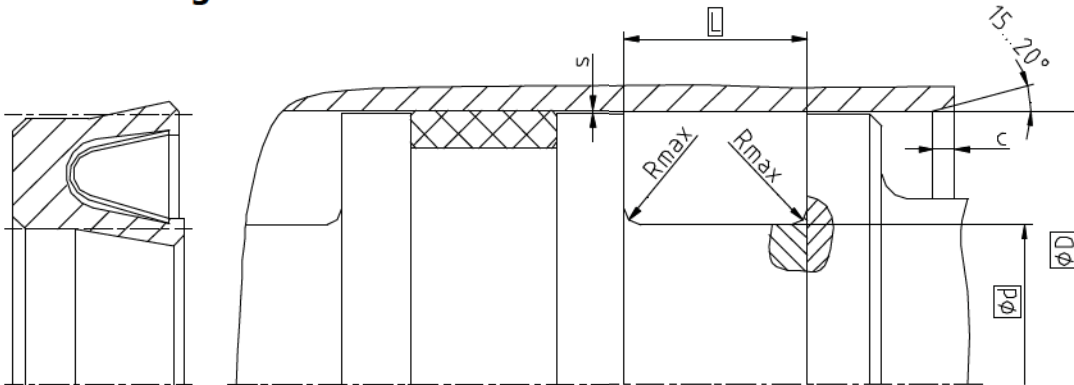

Surface roughness	Rtmax	Ra
Sliding Surface	≤ 2 µm	0,05...0,3 µm
Bottom of groove	≤ 6,3 µm	≤ 1,6 µm
Groove face	≤ 15 µm	≤ 3 µm

Ordering dimensions...□

Bearing area: 50...95% and a cutting depth of 0,5xRz based on Cref = 0%

Standard dimensions

ØD H9	Ød h10	L +0,2	Rmax	c	max. radial extrusion gap s*				
					20 bar	100 bar	200 bar	300 bar	400 bar
≥ 10 ... < 18	D - 4,5	3,6	0,3	1,13	0,25	0,12	0,10	0,08	0,07
≥ 18 ... < 50	D - 6,2	4,8	0,3	1,55	0,35	0,17	0,12	0,1	0,08
≥ 50 ... < 120	D - 9,4	7,1	0,3	2,35	0,45	0,22	0,17	0,12	0,1
≥ 120 ... < 630	D - 12,2	9,5	0,3	3,05	0,6	0,31	0,25	0,15	0,12
≥ 630 ... < 1600	D - 19	15	0,3	4,75	0,87	0,48	0,38	0,28	0,2

* Extrusion gap applies to a temperature of 80 °C, higher temperatures require lower values.

Operating parameters

Sealing material	Spring	Temperature	max. speed	max. pressure ¹
SKF ECOFLON 1	1.4310	-200 °C...+260 °C	15 m/s	200 bar (20 MPa)
SKF ECOFLON 2 SKF ECOFLON 3 SKF ECOFLON 4				400 bar (40 MPa)
SKF ECOWEAR 1000		-200 °C...+80 °C		200 bar (20 MPa)

The stated operation conditions represent general indications. It is recommended not to use all maximum values simultaneously. Surface speed limits apply only to the presence of adequate lubrication film.

¹ Pressure ratings depend on the size of the extrusion gap.

Ordering example

K19-F, D=100mm, d=90,6mm, L=7,1mm, SKF ECOFLON 3 / 1.4310

Piston Seal K19-F
Profile

100 x 90,6 x 7,1
D x d x L

SKF ECOFLON 3 / 1.4310
Sealing material / Spring