


50/60HZ PCB MOUNT TRANSFORMERS - EE RANGE 0.35 VA EE20-10 EE20 SERIES

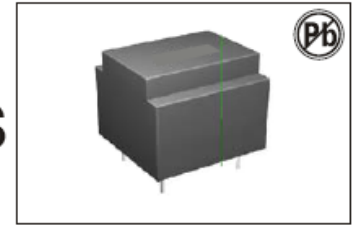

FEATURES:

It is miniaturised to be easily PCB mounted.
It has very high insulation of 4000Vrms Hi-pot.
It accords with UL94V-0 flammability requirements.
Heat-resistance reaches 130

OPTIONS:

Packaging unit: 50 pieces
Bulk packaging is standard
Custom design available

COMMON APPLICATIONS:

Medical equipments
Industrial equipments
Industrial controls
Test equipment
Industrial computers
Avionics & telecom


ELECTRICAL CHARACTERISTICS (@ 25 °C)

Part Number	Primary (V)	Secondary (V/mA)	No-load voltage(V)	Fig.	Part Number	Primary (V)	Secondary (V/mA)	No-load voltage(V)	Fig.
FAPE201011	230	6 / 83.0	8.90	1	FAPE201013	115	6 / 83.0	8.90	1
FAPE201012	230	9 / 55.0	13.50	1	FAPE201014	115	9 / 55.0	13.50	1
FAPE201013	230	12 / 42.0	19.40	1	FAPE201015	115	12 / 42.0	19.40	1
FAPE201014	230	15 / 34.0	24.60	1	FAPE201016	115	15 / 34.0	24.60	1
FAPE201015	230	18 / 28.0	29.50	1	FAPE201017	115	18 / 28.0	29.50	1
FAPE201016	230	24 / 21.0	39.60	1	FAPE201018	115	24 / 21.0	39.60	1
FAPE201017	230	2X6 / 42.0	2X9.60	2	FAPE201019	115	2X6 / 42.0	2X9.60	2
FAPE201018	230	2X9 / 28.0	2X15.20	2	FAPE201010	115	2X9 / 28.0	2X15.20	2
FAPE201019	230	2X12 / 21.0	2X19.10	2	FAPE201011	115	2X12 / 21.0	2X19.10	2
FAPE201010	230	2X15 / 16.0	2X23.30	2	FAPE201012	115	2X15 / 16.0	2X23.30	2
FAPE201011	230	2X18 / 14.0	2X29.20	2	FAPE201013	115	2X18 / 14.0	2X29.20	2
FAPE201012	230	2X24 / 10.0	2X38.80	2	FAPE201014	115	2X24 / 10.0	2X38.80	2

Frequency 50/60Hz Potted under vacuum
Split-bobbin Temperature class to 70 °C
Short-circuit-proof weight: 0.035kg

PHYSICAL CHARACTERISTICS

TECHNICAL INFORMATION

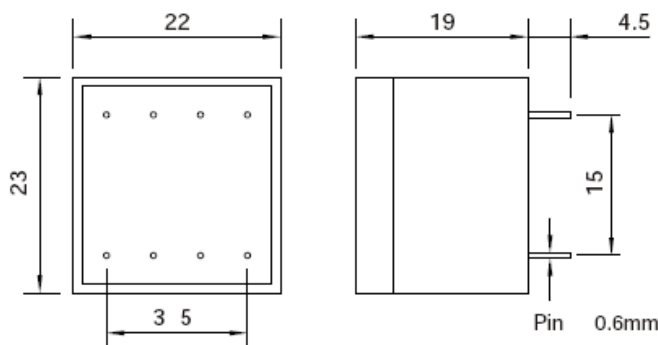

All dimensions in mm

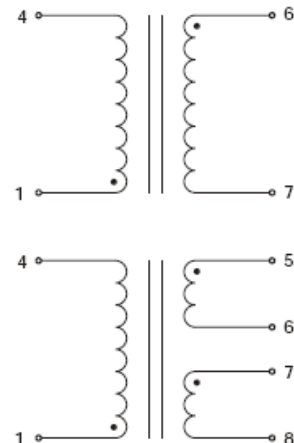


Fig 1

Fig 2