

## 50/60HZ PCB MOUNT TRANSFORMERS - EE RANGE 0.35VA EE20-6.1 EE20 SERIES

### FEATURES:

It is miniaturised to be easily PCB mounted.  
It has very high insulation of 4000Vms HI-pot.  
It accords with UL94V-0 flammability reqFAULrements.  
Heat-resistance reaches 130

### OPTIONS:

Packaging unit: 50 pieces  
Bulk packaging is standard  
Custom design available

### COMMON APPLICATIONS:


Medical equipments  
Industrial equipments  
Industrial controls  
Test equipment  
Industrial computers  
Avionics & telecom

## ELECTRICAL CHARACTERISTICS (@ 25 )

Part Number	Primary (V)	Secondary (V/mA)	No-load voltage(V)	Fig.	Part Number	Primary (V)	Secondary (V/mA)	No-load voltage(V)	Fig.
FAPE200601	230	6 / 58.0	10.80	1	FAPE200613	115	6 / 58.0	10.80	1
FAPE200602	230	9 / 39.0	16.50	1	FAPE200614	115	9 / 39.0	16.50	1
FAPE200603	230	12 / 29.0	21.90	1	FAPE200615	115	12 / 29.0	21.90	1
FAPE200604	230	15 / 23.0	27.00	1	FAPE200616	115	15 / 23.0	27.00	1
FAPE200605	230	18 / 19.0	31.50	1	FAPE200617	115	18 / 19.0	31.50	1
FAPE200606	230	24 / 14.0	41.70	1	FAPE200618	115	24 / 14.0	41.70	1
FAPE200607	230	2X6 / 29.0	2X10.95	2	FAPE200619	115	2X6 / 29.0	2X10.95	2
FAPE200608	230	2X9 / 19.0	2X15.60	2	FAPE200620	115	2X9 / 19.0	2X15.60	2
FAPE200609	230	2X12 / 14.0	2X20.70	2	FAPE200621	115	2 X 12/14.0	2 X 20.70	2
FAPE200610	230	2X15 / 12.0	2X26.00	2	FAPE200622	115	2X15 / 12.0	2X26.00	2
FAPE200611	230	2X18 / 9.5	2X31.20	2	FAPE200623	115	2X18 / 9.5	2X31.20	2
FAPE200612	230	2X24 / 7.0	2X41.90	2	FAPE200624	115	2X24 / 7.0	2X41.90	2

Frequency 50/60Hz      Potted under vacuum  
Split-bobbin              Temperature class to 70 /B  
Short-circuit-proof      weight: 0.024kg

## PHYSICAL CHARACTERISTICS

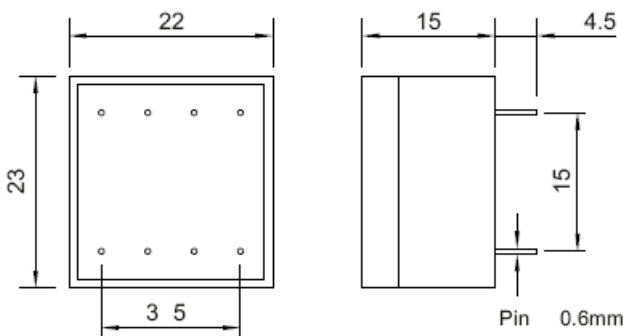

All dimensions in mm

## TECHNICAL INFORMATION

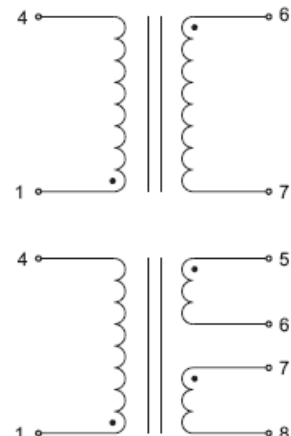


Fig 1

Fig 2