


# 50/60HZ PCB MOUNT TRANSFORMERS - EI RANGE 2VA EI 30-15.5-3015 SERIES

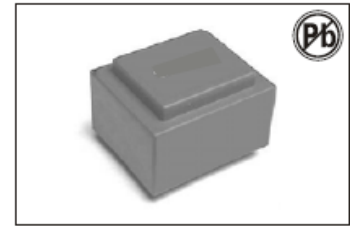

### FEATURES:

Vacuum filling  
Two compartments bobbins  
Self-extinguishing plastics UL 94 VO  
Degree of protection IP 00  
100 grams weight

### OPTIONS:

Bulk packaging is standard  
Custom design available

### COMMON APPLICATIONS:

Medical equipments Industrial equipments  
Industrial controls Test equipment  
Industrial computers Avionics & telecom

## ELECTRICAL CHARACTERISTICS




PRIMARY VOLTAGE: 230						PRIMARY VOLTAGE: 115					
Part Number	Secondary voltage V	Secondary Current mA	No-load voltage V	Ambient Temperature	Rating VA	Part Number	Secondary voltage V	Secondary Current mA	No-load voltage V	Ambient Temperature	Rating VA
FAPE301521	6	333	10.4	T70B	2	FAPE301533	6	333	10.4	T70B	2
FAPE301522	9	222	15.5	T70B	2	FAPE301534	9	222	15.5	T70B	2
FAPE301523	12	167	20.7	T70B	2	FAPE301535	12	167	20.7	T70B	2
FAPE301524	15	133	25.8	T70B	2	FAPE301536	15	133	25.8	T70B	2
FAPE301525	18	111	30.8	T70B	2	FAPE301537	18	111	30.8	T70B	2
FAPE301526	24	83	41.4	T70B	2	FAPE301538	24	83	41.4	T70B	2
FAPE301527	2 x 6	2 x 167	2 x 10.4	T70B	2	FAPE301539	2 x 6	2 x 167	2 x 10.4	T70B	2
FAPE301528	2 x 9	2 x 111	2 x 15.4	T70B	2	FAPE301540	2 x 9	2 x 111	2 x 15.4	T70B	2
FAPE301529	2 x 12	2 x 83	2 x 20.7	T70B	2	FAPE301541	2 x 12	2 x 83	2 x 20.7	T70B	2
FAPE301530	2 x 15	2 x 67	2 x 25.8	T70B	2	FAPE301542	2 x 15	2 x 67	2 x 25.8	T70B	2
FAPE301531*	2 x 18	2 x 56	2 x 30.8	T70B	2	FAPE301543	2 x 18	2 x 56	2 x 30.8	T70B	2
FAPE301532*	2 x 24	2 x 42	2 x 41.4	T70B	2	FAPE301544	2 x 24	2 x 42	2 x 41.4	T70B	2

\* To be noted : 2 x 18 V and 2 x 24 non safety transformer approved, conform to EN 61558-2-6 (Isolating transformer).

## TECHNICAL INFORMATION

Resin class B CEI 85 (20 000 h testing to CEI 126)  
Inherently short-circuits proof transformer  
30 V model is VDE EN 61558-2-6 certified (production on request)  
Insulation voltage 4 KV  
100% tested production  
Certification : CCA procedure on request

## PHYSICAL CHARACTERISTICS

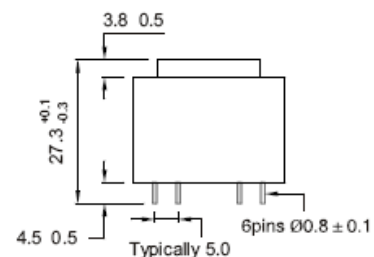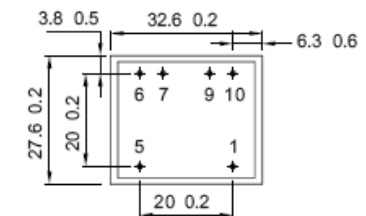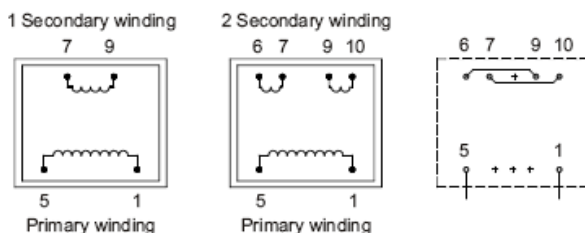

All dimensions in mm

Recommended Drill-hole Diameter for 1.3mm pins