

50/60HZ PCB MOUNT TRANSFORMERS - UI RANGE 40VA UI48X17 - 4817 SERIES

FEATURES:

115 V-230 V supply voltage by serie/parallel connection
Vacuum filling
Two compartments bobbins
Degree of protection IP 00

OPTIONS:

Bulk packaging is standard
Custom design available


COMMON APPLICATIONS:

Medical equipments Industrial equipments
Industrial controls Test equipment
Industrial computers Avionics & telecom

ELECTRICAL CHARACTERISTICS

PRIMARY VOLTAGE: 115~230				
Part Number	Secondary voltage V	Secondary Current mA	No-load voltage V	Ambient Temperature
FAUI 481767	2 x 6	2 x 3300	2 x 6.7	T50B
FAUI 481768	2 x 9	2 x 2222	2 x 10.0	T50B
FAUI 481769	2 x 12	2 x 1667	2 x 13.4	T50B
FAUI 481770	2 x 15	2 x 1333	2 x 16.7	T50B
FAUI 481771	2 x 18	2 x 1111	2 x 20.1	T50B
FAUI 481772	2 x 24	2 x 833	2 x 26.8	T50B

PHYSICAL CHARACTERISTICS

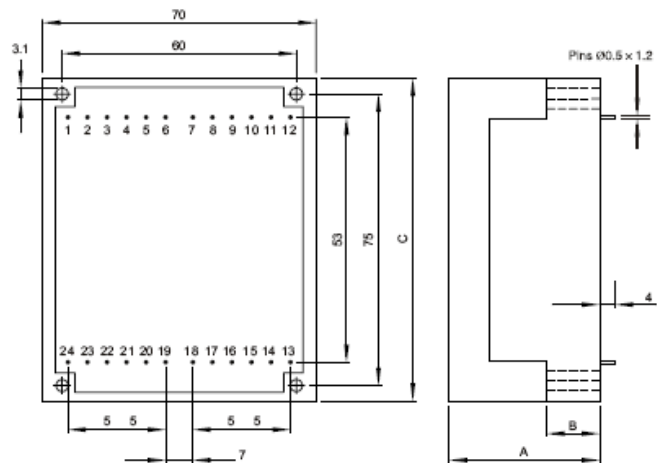


All dimensions in mm

TECHNICAL INFORMATION

Resin class UL 94 VO
Fuse protection in secondary winding (see diagram)
100% tested production
Conform to EN 61558 Approval under process
UL 506 approved

Possible primary connections

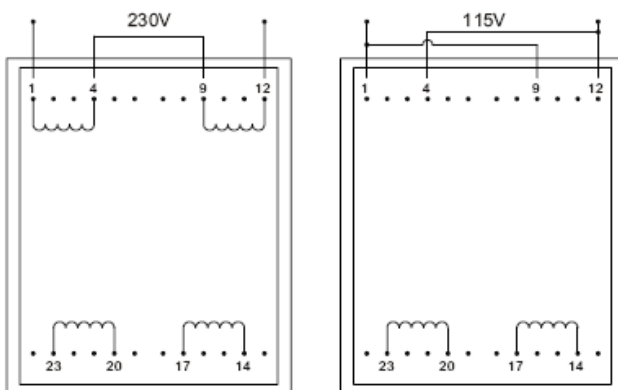

Possible secondary connections

