


50/60HZ PCB MOUNT TRANSFORMERS - UI RANGE 60VA UI48x26 - 4826 SERIES

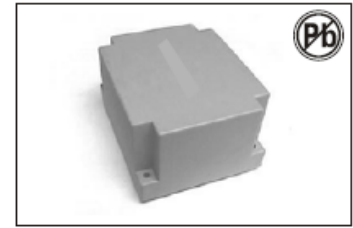

FEATURES:

115 V-230 V supply voltage by serie/parallel connection
Vacuum filling
Two compartments bobbins
Degree of protection IP 00

OPTIONS:

Bulk packaging is standard
Custom design available


COMMON APPLICATIONS:

Medical equipments Industrial equipments
Industrial controls Test equipment
Industrial computers Avionics & telecom

ELECTRICAL CHARACTERISTICS

PRIMARY VOLTAGE: 115~230				
Part Number	Secondary voltage V	Secondary Current mA	No-load voltage V	Ambient Temperature
FAUI 482673	2 x 6	2 x 5000	2 x 6.6	T50B
FAUI 482674	2 x 9	2 x 3333	2 x 9.9	T50B
FAUI 482675	2 x 12	2 x 2500	2 x 13.1	T50B
FAUI 482676	2 x 15	2 x 2000	2 x 16.4	T50B
FAUI 482677	2 x 18	2 x 1667	2 x 19.7	T50B
FAUI 482678	2 x 24	2 x 1250	2 x 26.3	T50B

PHYSICAL CHARACTERISTICS

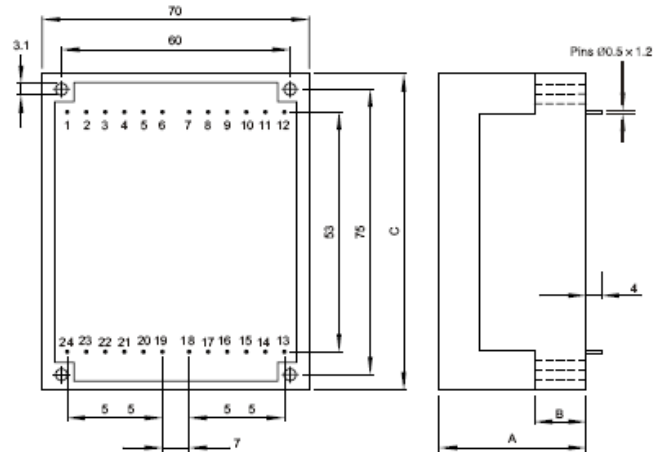


All dimensions in mm

TECHNICAL INFORMATION

Resin class UL 94 VO
Fuse protection in secondary winding (see diagram)
100% tested production
Conform to EN 61558 Approval under process
UL 506 approved

Possible primary connections

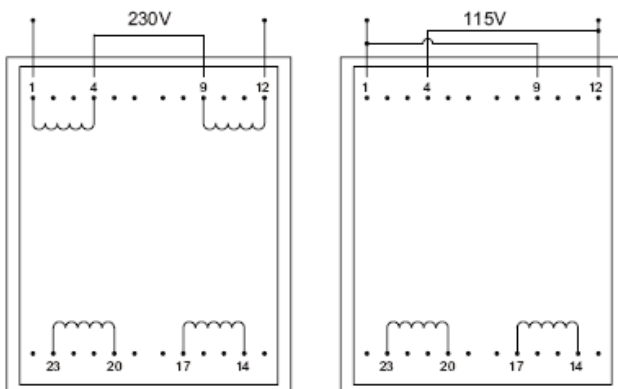

Possible secondary connections

