


50/60HZ PCB MOUNT TRANSFORMERS - EI RANGE 3.2VA EI 38-13.6-3813 SERIES



FEATURES:

- Vacuum filling
- Two compartments bobbins
- Self-extinguishing plastics UL 94 VO
- Degree of protection IP 00
- 150 grams weight

OPTIONS:

- Bulk packaging is standard
- Custom design available

COMMON APPLICATIONS:

- Medical equipments
- Industrial equipments
- Industrial controls
- Test equipment
- Industrial computers
- Avionics & telecom

ELECTRICAL CHARACTERISTICS

PRIMARY VOLTAGE: 230						PRIMARY VOLTAGE: 115					
Part Number	Secondary voltage V	Secondary Current mA	No-load voltage V	Ambient Temperature	Rating VA	Part Number	Secondary voltage V	Secondary Current mA	No-load voltage V	Ambient Temperature	Rating VA
FAPE381393	6	533	8	T70B	3.2	FAPE381305	6	533	8	T70B	3.2
FAPE381394	9	356	12	T70B	3.2	FAPE381306	9	356	12	T70B	3.2
FAPE381395	12	267	16	T70B	3.2	FAPE381307	12	267	16	T70B	3.2
FAPE381396	15	213	20	T70B	3.2	FAPE381308	15	213	20	T70B	3.2
FAPE381397	18	178	24.1	T70B	3.2	FAPE381309	18	178	24.1	T70B	3.2
FAPE381398	24	133	32.1	T70B	3.2	FAPE381310	24	133	32.1	T70B	3.2
FAPE381399	2 X 6	2 X267	2 X 8	T70B	3.2	FAPE381311	2 X 6	2 X267	2 X 8	T70B	3.2
FAPE381300	2 X 9	2 X178	2 X 12	T70B	3.2	FAPE381312	2 X 9	2 X178	2 X 12	T70B	3.2
FAPE381301	2 X12	2 X133	2 X 16	T70B	3.2	FAPE381313	2 X12	2 X133	2 X 16	T70B	3.2
FAPE381302	2 X15	2 X107	2 X 20	T70B	3.2	FAPE381314	2 X15	2 X107	2 X 20	T70B	3.2
FAPE381303	2 X18	2 X89	2 X 24	T70B	3.2	FAPE381315	2 X18	2 X89	2 X 24	T70B	3.2
FAPE381304*	2 X24	2 X67	2 X32.1	T70B	3.2	FAPE381316	2 X24	2 X67	2 X32.1	T70B	3.2



* To be noted : 2 x 24 V non safety transformer approved, conform to EN 61558-2-6 (Isolating transformer).

TECHNICAL INFORMATION

Resin class B CEI 85 (20 000 h testing to CEI 126)
Fuse protection on secondary side (see diagram) to be assumed by customer
30 V and 36 V models are VDE EN 61558-2-6 certified (production on request)
Insulation voltage 4 KV
100% tested production
Certification : CCA procedure on request

PHYSICAL CHARACTERISTICS

All dimensions in mm

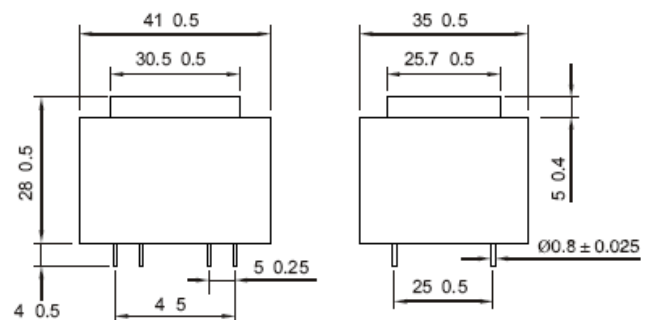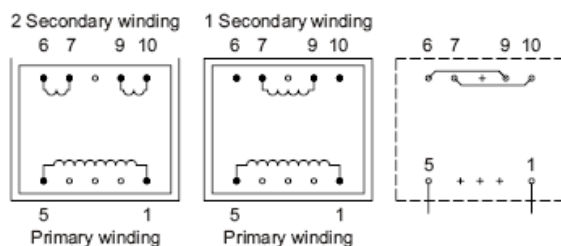

Recommended Drill-hole Diameter for 1.3mm pins