


PRODUCT DATA SHEET

Version: 07.12.2016 | 10:53 h

ITEM NO. 7503

Description	Movement joint profile for interior and exterior plaster
Specification	Galvanised steel movement joint profile for plaster surfaces. The centre part is made of a combination of rigid and soft PVC. Movement absorption: Pull/push: +2/-1 mm For vertical use only on damp and wet surfaces. Centre part not really suitable for painting. Central piece can only sustain limited coatings. The approval of the coating producer is necessary.
Product Group	Plasterprofiles Exterior plaster profiles Plasterprofiles Interior plaster profiles
Product Category	Expansion / Movement joint profiles
Plaster Thickness	14 mm
Material	galvanised steel
Norm	EN 13658-2
Colour	white
Reaction to Fire	E
Package	10 piece
Length in cm	300 cm

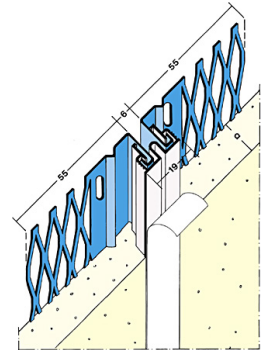

The present product sheet shows the current state of development of our products: with the publication of a new version this is no longer valid. Ensure that you always are using the most recent version of this information. Guarantees and liability upon delivery are defined in our general Terms of Business. Please follow the guidelines for use, fitting and siting. All information is subject to change.

Tender documents, fitting instructions and declarations of performance (where legally required) can all be found on our website. For the sake of the environment, please dispose of correctly!

PROTEKTORWERK
Florenz Maisch GmbH & Co. KG
Postfach 1420, D-76554 Gaggenau
Viktoriastr. 58, D-76571 Gaggenau

Tel.: +49 7225 977 - 0
Fax: +49 7225 9 77 - 111
info@protektor.com
www.protektor.com



PROFILE FÜR
MODERNES
BAUEN