



# FILTREXX® SILTSOXX™

## NTS


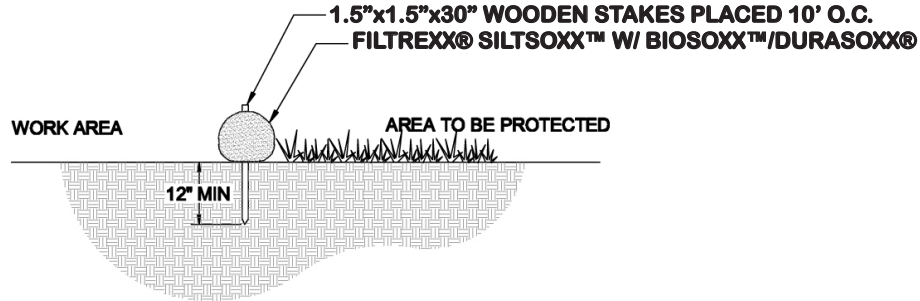


**SECTION** NTS

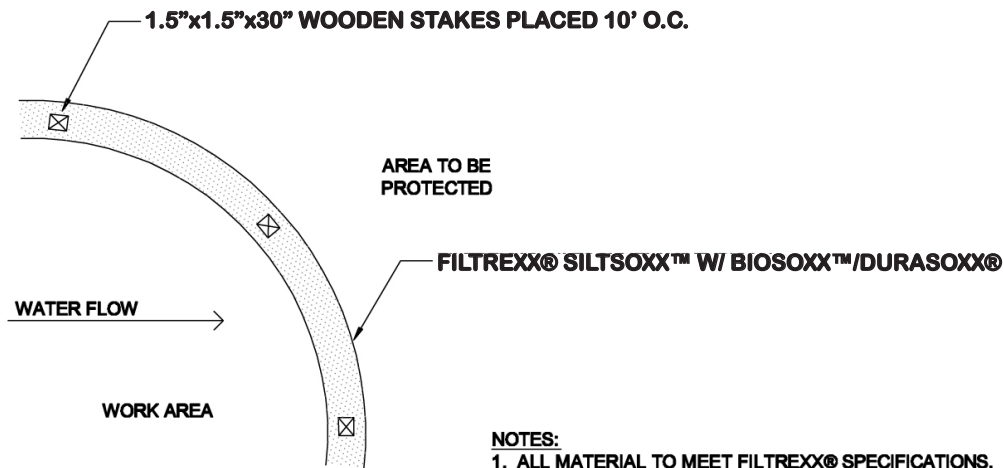

**PLAN** NTS

- NOTES:**
1. ALL MATERIAL TO MEET FILTREXX® SPECIFICATIONS.
  2. FILTER MEDIA™ FILL TO MEET APPLICATION REQUIREMENTS.
  3. COMPOST MATERIAL TO BE DISPERSED ON SITE, AS DETERMINED BY ENGINEER.

<b>SiltSoxx™ Material Type</b>	Multi-Filament Polypropylene DuraSoxx® HD	Cotton BioSoxx™
<b>Material Characteristic</b>	Photodegradable	Biodegradable
<b>Design Diameters</b>	8 in (200mm), 12 in (300mm), 18 in (400mm)	8 in (200mm), 12 in (300mm)
<b>Mesh Opening</b>	1/8 in (3mm)	1/8 in (3mm)
<b>% Original Strength from Ultraviolet Exposure (AS™ G-155)</b>	100% at 1000 hr	ND
<b>Functional Longevity/ Project Duration</b>	2-5 yr	up to 12 mo.
	 <p>Filtrexx DuraSoxx® HD MFPP</p>	 <p>Filtrexx® BioSoxx™</p>