

Super Silt

**A. Galvanized 11 Gauge 42" Chain Link Mesh Fabric**

Recommended Usage	Mesh Size	Gauge Coated Wire	Nominal Diameter Coated Wire	Height of Fence Fabric In Inches (mm)	Minimum Breaking Strength lbf (N)*
Super Silt Fence	2"	11	0.120" (3.05 mm)	42(1070)	850" (3780)

Meets ASTM A-392, Class1, AASHTO M-181, 1,2 oz Zinc

Galvanized chain link fabric manufactured in the United States from quality steel rod and galvanized after weaving, assuring 100% zinc coverage.

**B. SS 20 Galvanized Steel Posts - 2-1/2" diameter x 6'**

Manufactured from prime quality steel. Hot Dip galvanized to 1.2 oz Zinc coat.

**C. Fitting and Accessories**

**Aluminum Fence Ties - 11 Gauge Aluminum Ties 8-1/2"**

**Hog Rings - Steel**

**E. 50" WF-901 SILT FENCE FABRIC**

PROPERTIES	TEST METHOD	MARV*
Tensile (lbs) (warp/fill)	ASTM D 4632	120/100
Grab Elongation (%)	ASTM D 4632	15
Trapezoid Tear (lbs)	ASTM D 4533	50
Puncture (lbs)	ASTM D 4833	60
Mullen Burst (psi)	ASTM D 3786	280
Ultra-Violet Stability strength retained %) 500 hours exposure	ASTM D 4355 (xenon arc)	90
Apparent Opening Size (S. sieve no. equivalent)	ASTM D 4751	20
Permittivity (sec -1 )	ASTM D 4491	0.05

\* Minimum Average Roll Value

## **SUPER SILT FENCE KIT**

**PART NO. 14987-180-50**

Each kit contains materials for 300' of Super Silt Fence w/ posts 10' on center

**6 rolls (300')**

**42" x 50' Galvanized 11 Gauge 42" Chain Link Mesh Fabric**

**31 posts**

**SS 20 Galvanized Steel Posts - 2-1/2" diameter x 6'**

**1 bag (100)**

**Aluminum Fence Ties - 11 Gauge Aluminum Ties 8-1/2"**


**1 bag (2 Lbs)**

**Hog Rings - Steel**

**300' lin ft**

**50" WF-901 SILT FENCE FABRIC**

\* MUST BE PURCHASED IN 300' INCREMENTS WITH

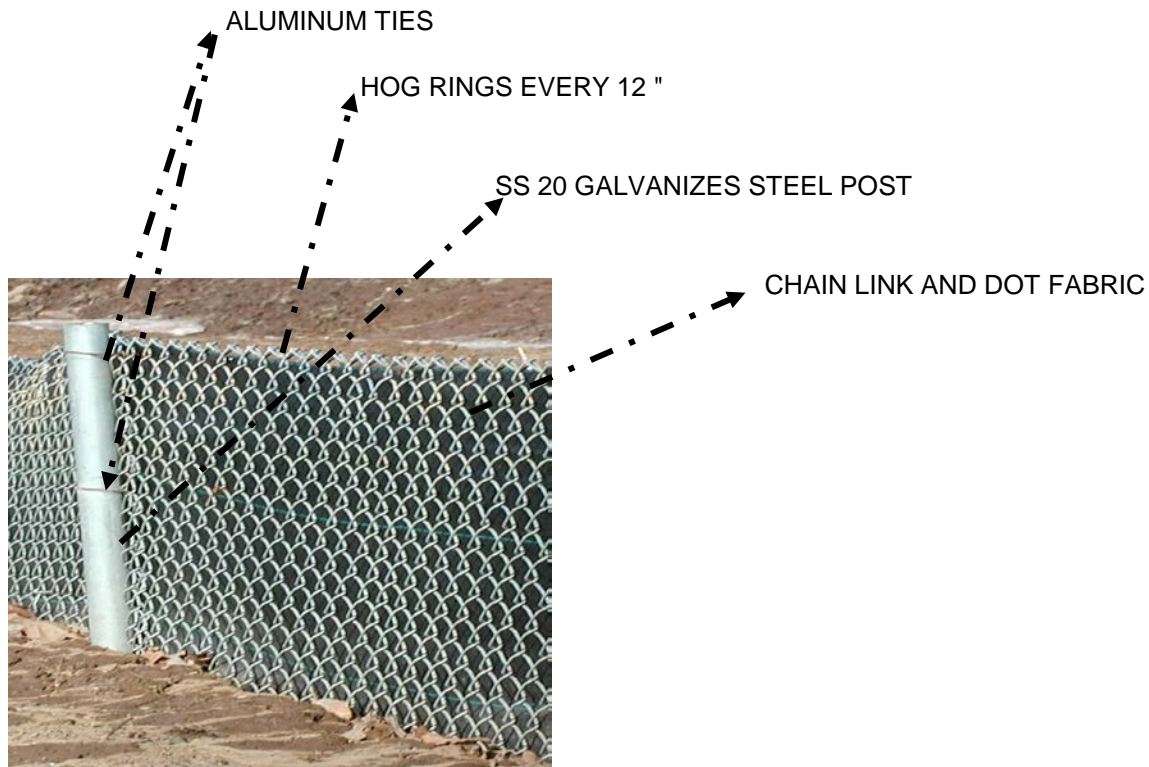

**7ga TENSION WIRE SOLD SEPARATELY**