

TUBO | Pratico

EN





**TUBO** | Pratico

Unparalleled convenience.



Cleaning is even more simple and rapid.

PRATICO represents a new solution simplifying the cleaning of rooms and which completes the centralised TUBÒ vacuum system, making the way we clean even easier.

PRATICO is the evolution of the TUBÒ vacuum system. The hose, used during cleaning, disappears into the wall.

One single socket oversees the entire vacuum system.



Company has been issued with the UNI EN ISO 9001 certification relative to the quality management system and the UNI EN ISO 14001 certification relative to the environmental system



# TUBO | Pratico

## Maximum integration

- PRATICO is light and functional.
- It boasts a balance of features which makes it the perfect fusion between style and practicality.
- It can be painted in the same colour as the walls. PRATICO has a discreet and pleasant presence within rooms.



## PRATICO advantages

1. **CONVENIENT:** There is no longer any need to transport, handle and reposition the hose once you have finished cleaning.
2. **RAPID:** Even faster cleaning. With a simple action, you can open the hatch, extract the hose and PRATICO is ready to use.
3. **QUITE COMPACT:** The hose disappears into the wall. You do not need a storage cupboard in which to place it.

PRATICO  
Even more convenient.



*Floor installation example*



## PRATICO components

1. Twelve metre hose, complete with braiding overseeing sliding and protection. .
2. End union for connection to the grip.
3. PRATICO socket complete with hatch.
4. Lever to activate the central power unit.
5. Hose locking lever.





# TUBO | Pratico

## Operation

With PRATICO, cleaning has never been so easy.

In order to use PRATICO, you simply have to carry out 4 simple actions:

1. Open the hatch and extract the quantity of hose necessary for cleaning.
2. Lock the hose using the relative lever.
3. Switch on the central power unit, moving the BLUE lever to the ON position.\*
4. Insert the hose end union to the grip.

To hide PRATICO, you simply have to carry out 4 other actions:

5. Whilst the central power unit is still in operation, move closer to the socket and unhook the grip from the hose.
6. Release the hose, moving the lock lever.
7. Block the hose end union using the palm of the hand until it winds in completely.
8. Switch off the central power unit, closing the hatch,

\*NOTE: the PRATICO Wireless system is also available where electric cables were provided in the system set-up stage.

Rapid, easy, clean: Pratico.



# TUBÒ | Pratico

Design specifications



Pratico. Perfect for all requirements.



- We recommend PRATICO is installed in a barycentric position to cover the maximum surface area possible. It is possible to install multiple PRATICO socket points in order to clean larger surface areas.
- PRATICO can only be used with single-user (one operator only) systems.
- PRATICO is compatible with and can be installed to the traditional Tubò system, enabling, additionally, the establishment of a mixed system.
- PRATICO is reversible.
- PRATICO can be installed both to brick and plasterboard walls.
- The Ø 2" inflexible hose must be longer, by more than a metre, than the flexible pipe which runs through the inside.





1. Tubò central power unit
2. PRATICO hose
3. PRATICO
4. PRATICO Ø 2" inflexible and curved hose with wide radius

Example installation with 2 PRATICO covering large surfaces

- PRATICO can be set up flush with the flooring or installed to the false ceiling using the TUBÒ Ø 2" (Ø 50.8 mm) curved hose with wide radius.
- To optimise and improve the sliding movement of the flexible hose within the Ø 2" inflexible hose, during set-up, ensure there are as few elbows as possible and, in any case, no more than those present in the PRATICO set-up set.

- The central power unit selection is based upon the number of PRATICO socket points installed, as per the following:


No. PRATICO	Mod. Central power unit
1 - 2 PRATICO	TX3A - TP3A - TP3 - TC3 or TX4A - TP4A - TP4 - TC4 - TS4
3 - 4 PRATICO	TX4A - TP4A - TP4 - TC4



Pratico, the practical TUBÒ system. Perfect integration.

Pratico includes:

1. Hatch with reversible opening, paintable
2. PRATICO reversible socket
3. Provisional cover for the PRATICO socket frame
4. PRATICO plasterboard socket frame

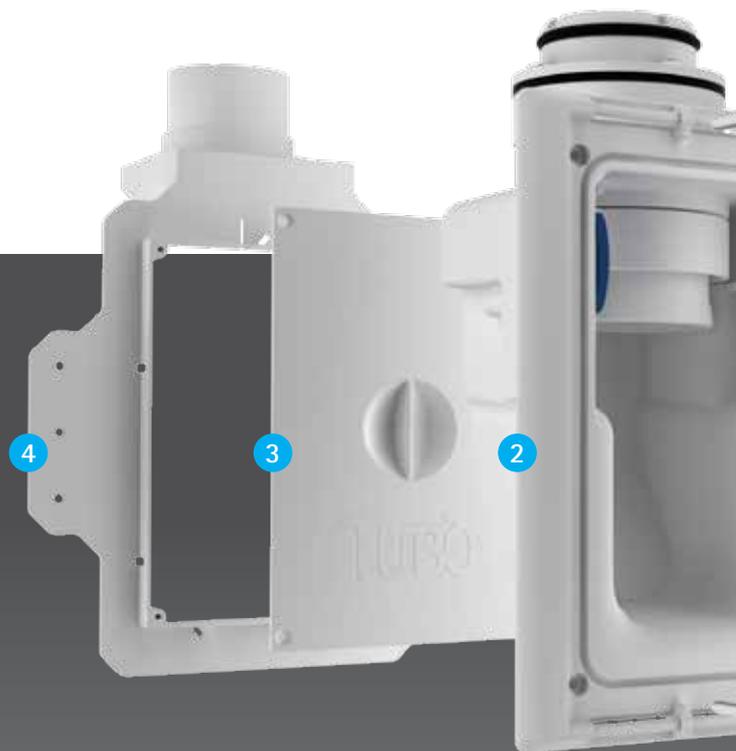

PRATICO preparation kit

Code TR31PR

1 Ø 2" PRATICO plasterboard socket point preparation kit

Comprising:

no. 1	code PA070PR	2" Ø PRATICO plasterboard socket frame
m. 14	code TR20PR	2" Ø PRATICO PVC hose, 1.6 mm thick (per m) (2 m bars)
no. 3	code TRX25PR	2" Ø PRATICO PVC elbow at 90° FF, wide radius
no. 2	code TRX22PR	2" Ø PRATICO PVC elbow at 45° FF, wide radius
no. 2	code TRX28PR	2" Ø PRATICO PVC elbow at 22.5° FF, wide radius
no. 5	code TR21PR	2" Ø PRATICO PVC rubber sleeve with head
no. 1	code TR212	ABS Ø50 M rubber sleeve adaptor at 2" Ø F
no. 1	code CF103	Self-welding adhesive for PVC, 125 g tube with brush
m. 25	code PE111	Pre-wired N07VK 2x1 sheathing Ø16 IMQ
no. 14	code CF200	OHM Ø50 type metal collar
no. 15	code PE410	PVC blue 30 cm wiring clamps (Pack with 100 pcs)
no. 1		Installation Manual

Code TR41PR

1 Ø 2" PRATICO wall socket point preparation kit

Comprising:

no. 1	code PA075PR	2" Ø PRATICO wall socket frame
m. 14	code TR20PR	2" Ø PRATICO PVC hose, 1.6 mm thick (per m) (2 m bars)
no. 3	code TRX25PR	2" Ø PRATICO PVC elbow at 90° FF, wide radius
no. 2	code TRX22PR	2" Ø PRATICO PVC elbow at 45° FF, wide radius
no. 2	code TRX28PR	2" Ø PRATICO PVC elbow at 22.5° FF, wide radius
no. 5	code TR21PR	2" Ø PRATICO PVC rubber sleeve with head
no. 1	code TR212	ABS Ø50 M rubber sleeve adaptor at 2" Ø F
no. 1	code CF103	Self-welding adhesive for PVC, 125 g tube with brush
m. 25	code PE111	Pre-wired N07VK 2x1 sheathing Ø16 IMQ
no. 15	code PE410	PVC blue 30 cm wiring clamps (Pack with 100 pcs)
no. 1		Installation Manual



## Perfect integration between Pratico and the TUBÒ System

Make the TUBÒ central vacuum system even more convenient and rapid when used with the new solution governing the use and storage of the hose: PRATICO.

Rapid, easy, clean. Pratico

## PRATICO finishing kit

### Code K12PR

#### 12 ml PRATICO finishing kit

Comprising:

no. 1	code PA100PR	PRATICO vacuum socket, white
no. 1	code AP12PR	12 ml PRATICO flexible hose , Ø32 , including unions and protective braid
no. 1	code AP314PR	Curved union PRATICO Ø32 grip with pressure regulator

### Code K12WPR

#### 12 ml PRATICO Wireless finishing kit

Comprising:

no. 1	code PA100PR	PRATICO vacuum socket, white
no. 1	code AP12PR	12 ml PRATICO flexible hose , Ø32 , including unions and protective braid
no. 1	code CM184PR	PRATICO Wireless start-up/stop kit for central power unit models TXA -TPA -TP- TC (complete with receiver)

## PRATICO components (unpacked codes)

### PRATICO vacuum socket

1 + 2

Code PA100PR PRATICO vacuum socket, white

### Hose and grip

Code AP12PR 12 ml PRATICO flexible hose , Ø32 , including unions and protective braid

Code AP314PR Curved union - Hose grip - PRATICO Ø32 with pressure regulator

### Wireless Kit

Code CM184PR PRATICO Wireless start-up/stop kit for central power unit models TXA -TPA -TP- TC (complete with receiver)

Code CM182PR PRATICO Wireless start-up/stop kit for central power unit models TS (complete with receiver)

### Plasterboard socket frame

3 + 4

Code PA070PR PRATICO socket frame, Ø2" for Plasterboard

### Wall socket frame

Code PA075PR PRATICO socket frame, Ø2" for Wall

### Hoses and Unions

Code TR20PR PRATICO PVC hose, Ø2" thickness of 1.6 mm (per m) (2 m bars)

Code TR21PR Ø2" PRATICO PVC rubber sleeve with head

Code TR212 ABS Ø50 M rubber sleeve adaptor at Ø2" F

Code TRX28PR Ø2" PRATICO PVC elbow at 22.5° FF Wide radius

Code TRX22PR Ø2" PRATICO PVC elbow at 45° FF Wide radius




Code TRX25PR Ø2" PRATICO PVC elbow at 90° FF Wide radius

## Pratico Installation


PRATICO can be set up flush with the flooring or installed to the false ceiling using a curved hose with specific wide radius of  $\varnothing 2''$  ( $\varnothing 50.8$  mm). The  $\varnothing 2''$  inflexible hose must be longer, by more than a metre, than the flexible pipe which runs through the inside.

### PRATICO plasterboard socket frame installation


The socket frame may be positioned facing upwards **A** or downwards **B** but never horizontally. Ensure there is a minimum clearing distance (80 cm) from any obstacles (doors, walls, etc.) to ensure correct use of PRATICO.

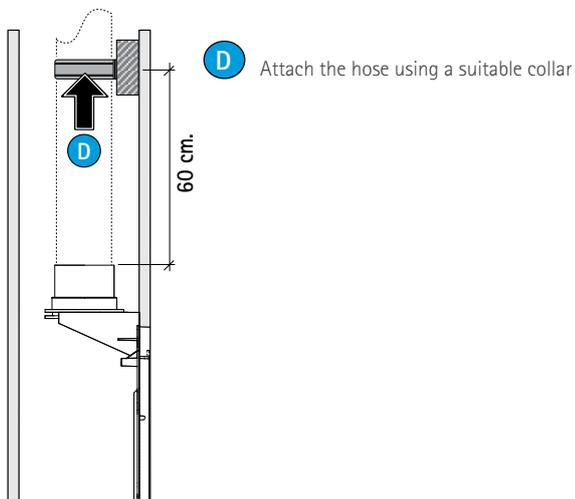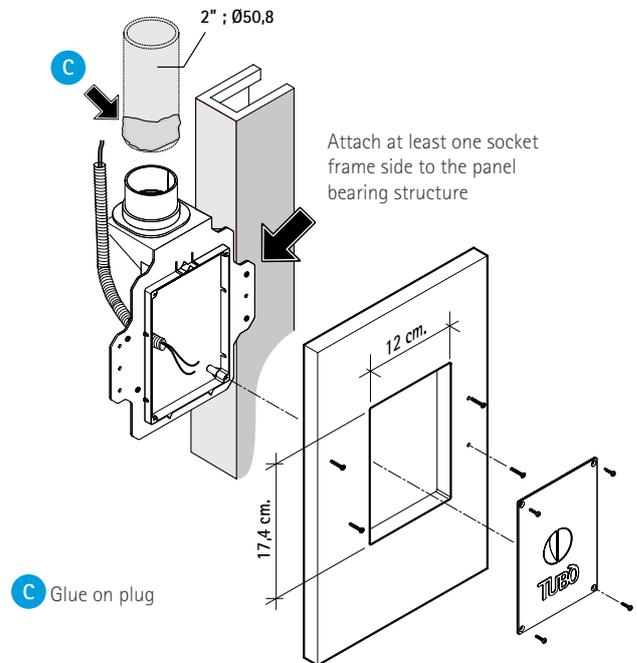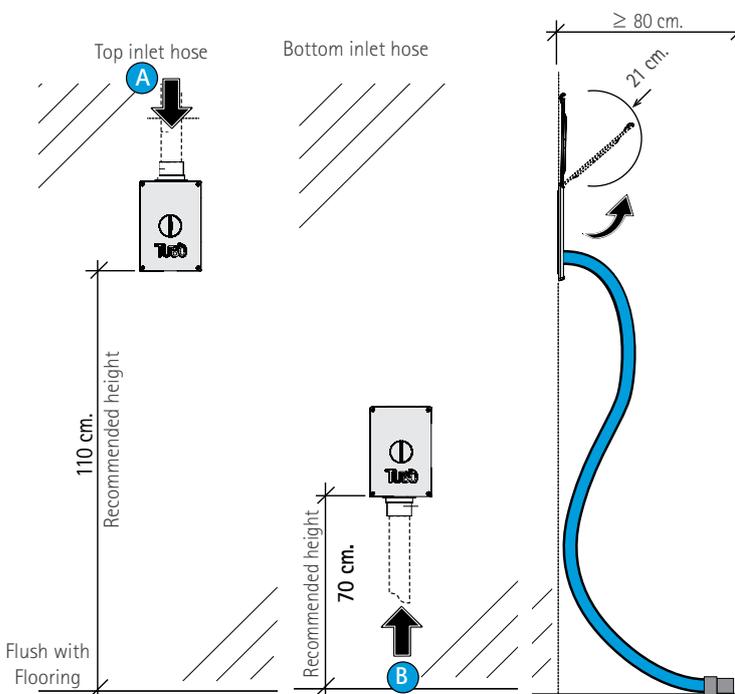

Minimum socket frame gap - 10 cm

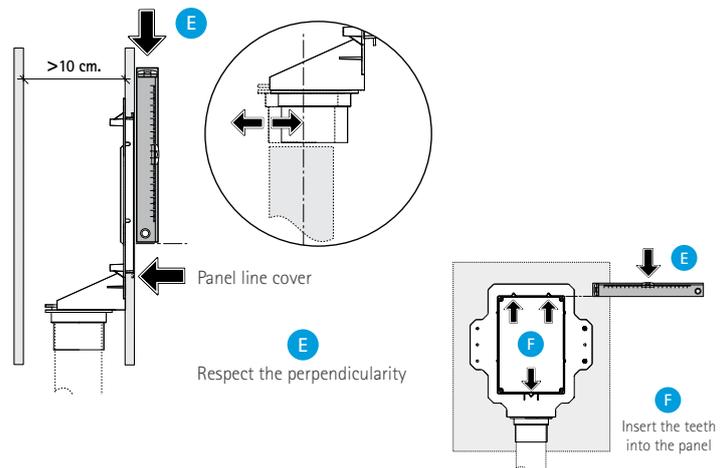

## PRATICO wall socket frame installation

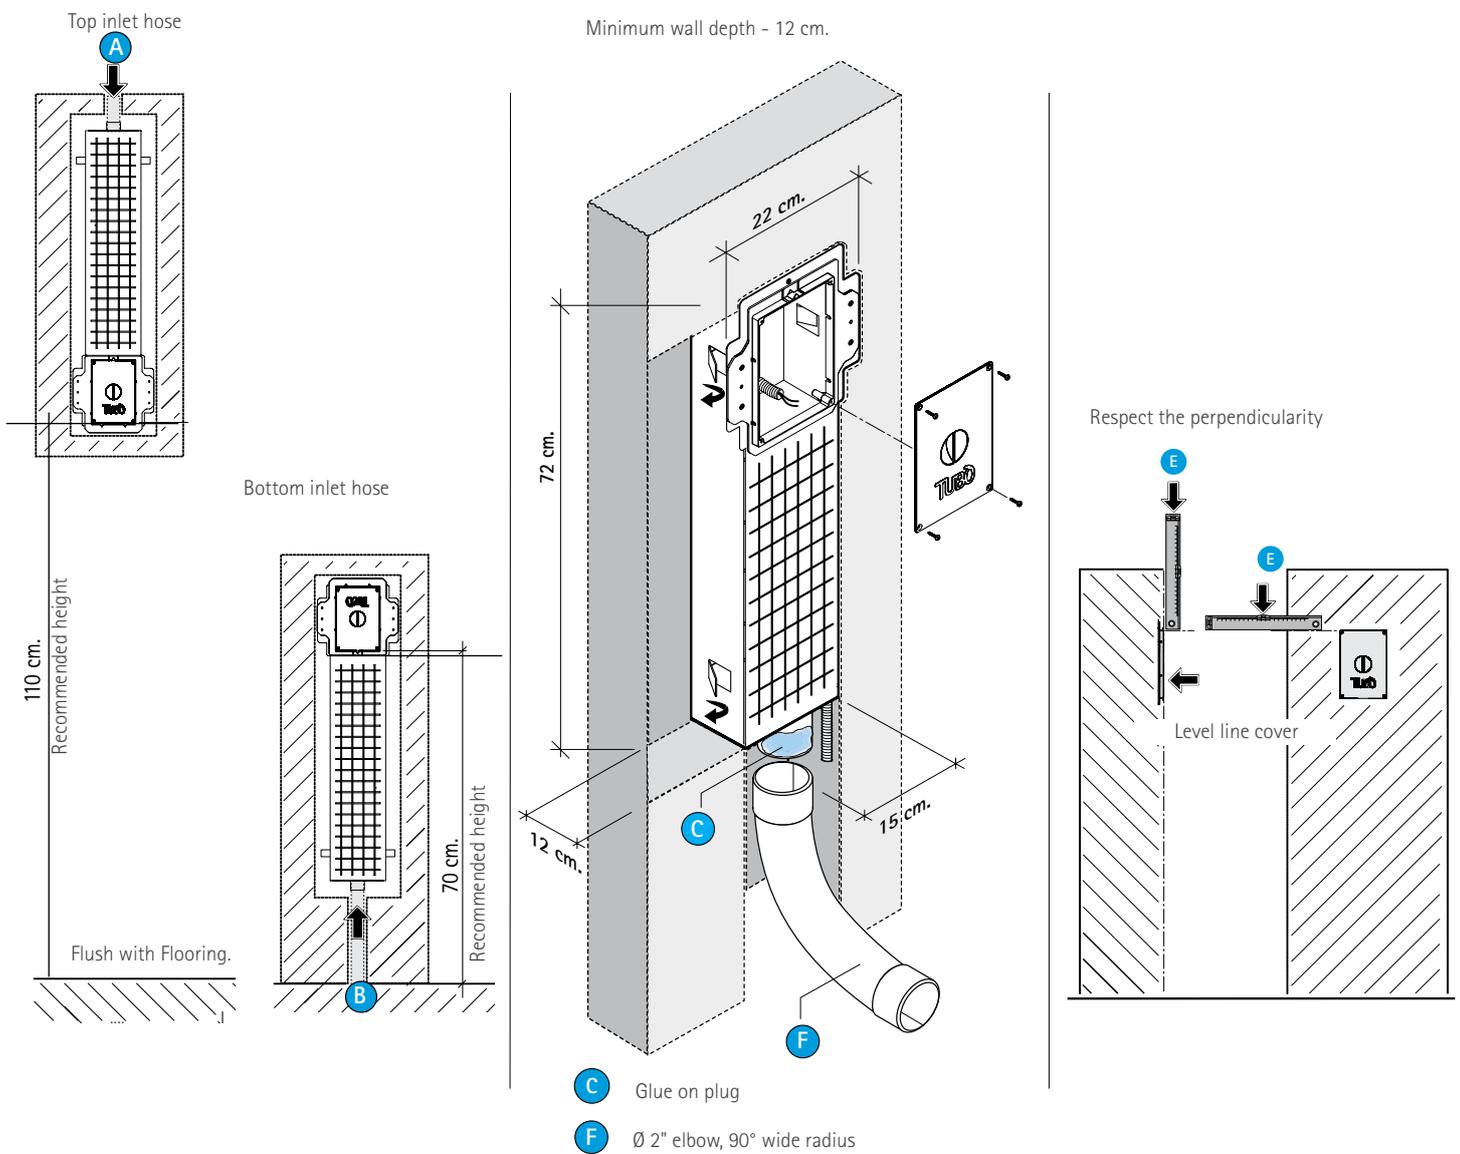



## Pratico and the TUBÒ System Compatibility guaranteed

*The vast majority of TUBÒ System accessories are perfectly compatible with PRATICO.*

The Aertecnica TUBÒ vacuum system boasts a large range of accessories to satisfy all requirements when it comes to convenience and space, enabling the vacuum system to be used in all parts of the home.



## Some Kits and Accessories

### *TUBÒ Easy Sack (Code AP330)*

Tubò Easy Sack is a practical wand and brush holder sack, made of hard-wearing nylon in 840 denier. Equipped with a strengthened zip closure and side handles which allow for lifting. To hang use metal hook code AP332



Sizes:  
63x22x16 cm (LXPXH) | Weight: 0.35 Kg  
Accessories used in the photo not included.

### *Standard Kit (Code AP244)*

Comprising:

- TUBÒ Easy Sack
- Metal hose hook and Tubò Easy Sack holder
- Brush set including: revolving dusting brush, crevice nozzle, radiator brush, clothes brush, brush for mattresses and upholstery with felt, 30 cm universal floor brush with castors and bristles
- Advanced chromed wand





**Code AP328**  
Dual use floor and carpet brush with castors 27 cm, Ø 32



**Code AP344**  
Ø 32 brush for wood flooring, 25 cm with felt, no castors



**Code AP342**  
Crevice nozzle, Ø 32



**Code AP351**  
Carpet turbo-brush with castors, Ø 32



**Code AP345**  
Universal floor brush with castors and bristles, 30 cm, Ø 32



**Code AP333**  
Revolving Flexible Curves Brush Ø32 cm 30, dual vacuum and polish use, for tiles and wood



**Code AP331**  
Clothes brush, Ø 32



**Code AP352**  
TURBOCAT Ø 32 carpet turbo-brush, 32 cm, with castors  
*Suitable for the tertiary sector and large surfaces.*



**Code AP340**  
Brush for mattresses and upholstery with felt, Ø 32



**Code AP338**  
Wooden floor brush with natural bristles, 30 cm, Ø 32



**Code AP334**  
Revolving dusting brush, Ø 32



**Code AP350**  
Upholstery turbo-brush, Ø 32





**Code AP358**  
Venetian blinds brush, Ø 32




**Code AP337**  
Radiator brush, Ø 32

Discover the entire accessory range at:  
[www.aertecnica.com](http://www.aertecnica.com)

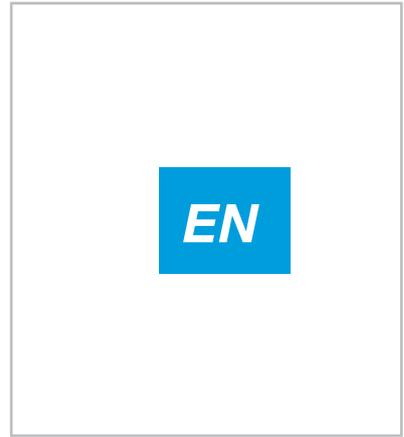

Aertecnica distributor stamp

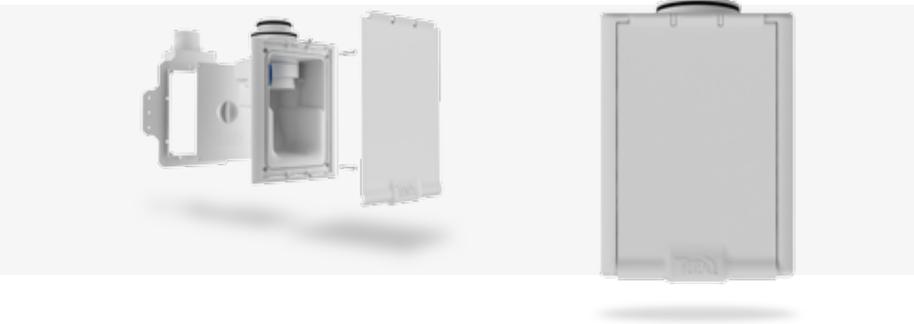

**Aertecnica S.p.A.**  
Via Cerchia di S. Egidio, 760  
47521 Cesena (FC) Italy  
Tel. +39 0547 637311  
Fax +39 0547 631388  
info@aertecnica.com  
[www.aertecnica.com](http://www.aertecnica.com)

*All images in the present document are the property of Aertecnica SpA. By law, copying of the images, is prohibited. All specific signs (brands, slogans, designs) included in the present are the property of Aertecnica SpA, who holds the exclusive rights. All data and technical specifications quoted in the present, are used by way of examples. The Company reserves the right to modify them without providing prior warning. Photographs: marconofri.com Graphics: matildestudio.com | Location: Famiglia Campana | Cesena (FC)*



This catalogue was printed on wood-free glossy paper, produced in a neutral environment, without the use of acids. The paper is FSC certified. The FSC logo identifies products which contain wood from forests which are managed in compliance with Forest Stewardship Council norms.